



Air Conditioning & Heating

PRODUCT SPECIFICATIONS



1½ TO 5 Ton

ASPF

MULTI-POSITION AIR HANDLER WITH ENERGY-SAVING MOTOR

The Goodman® ASPF Multi-Position Air Handler is suitable for use with refrigerants R-410A and R-22. This unit's blower design includes an EEM (energy-saving), fixed-speed motor that can enhance the efficiency of air conditioners and heat pumps.

Standard Features

- Suitable for use with refrigerants R-410A and R-22
- Check flowrate expansion device for cooling and heat pump applications
- Energy-saving, fixed-speed motor
- Enhances the performance of your Goodman® air conditioner or heat pump
- Multi-position — upflow, downflow or horizontal
- Built-in coil has horizontal, vertical, and downflow drain pans with secondary drain connections
- Complies with the Factory-sealed Air Handling Credit as listed in the 2001 Florida Building Code, Chapter 13, Section 610.2.A.2.1
- ARI Certified
- ETL Listed



Cabinet Features

- Fully insulated, painted steel cabinet with attractive Architectural Gray finish
- Built-in filter rack for 1" filter (filter not included)
- Low-voltage cabinet connections
- Power supply on top
- Low-voltage entry on top or side
- Factory-sealed to achieve 2% or less leakage rate at 1.0" water gauge external duct static pressure




NOMENCLATURE

	A	S	P	F	2405	1	6	AA	
	1	2	3	4	5,6,7,8	9	10	11,12	
Brand	A Single-piece Air Handler								Engineering * Major/ Minor Revisions * Not used for inventory management
Unit Application	C Ceiling Mount PSC Motor D Downflow PSC Motor E Multi-Position Variable-Speed Motor R Multi-Position PSC Motor S Multi-Position EEM Motor W Wall Mount PSC Motor								Refrigerant Charge No Digit = R-22 only 6 = R-410A or R-22
Cabinet Finish	U Unpainted P Painted N Uncased								Electrical 1 208/240 V, 1 Phase, 60 Hz
Expansion Device	F Flowrater T Expansion Valve								Nominal Capacity Range @ 13 SEER Multi-Position & Downflow Applications 1729 1½ to 2½ Tons (for Export Systems) 1830 1½-3½ Tons 3642 3-3½ Tons Ceiling Mount & Wall Mount Applications (Nominal Cooling Capacity/ Electric Heat kW) 1805 1½ Tons Cooling/ 5 kW Electric Heat 2405 2 Tons Cooling/ 5 kW Electric Heat 3608 3 Tons Cooling/ 8 kW Electric Heat

SPECIFICATIONS

	ASPF183016	ASPF303616	ASPF426016
Blower			
Diameter	9½"	10⅝"	10 ¹⁵ / ₁₆ "
Width	8"	10⅝"	10 ¹¹ / ₁₆ "
Coil Drain Connection FPT	¾"	¾"	¾"
Service Valve			
Liquid	⅜"	⅜"	⅜"
Suction	¾"	⅞"	⅞"
Electrical Data			
Voltage	208/230	208/230	208/230
Min. Circuit Ampacity	3.1/3.1	3.8/3.8	5.3/5.3
Max. Overcurrent Protection (amps)	15/15	15/15	15/15
Minimum VAC	197	197	197
Maximum VAC	253	253	253
Blower Motor			
FLA	2.5	3.0	4.2
HP	½	¾	¾
Ship Weight (lbs)	125	176	195

DIMENSIONS

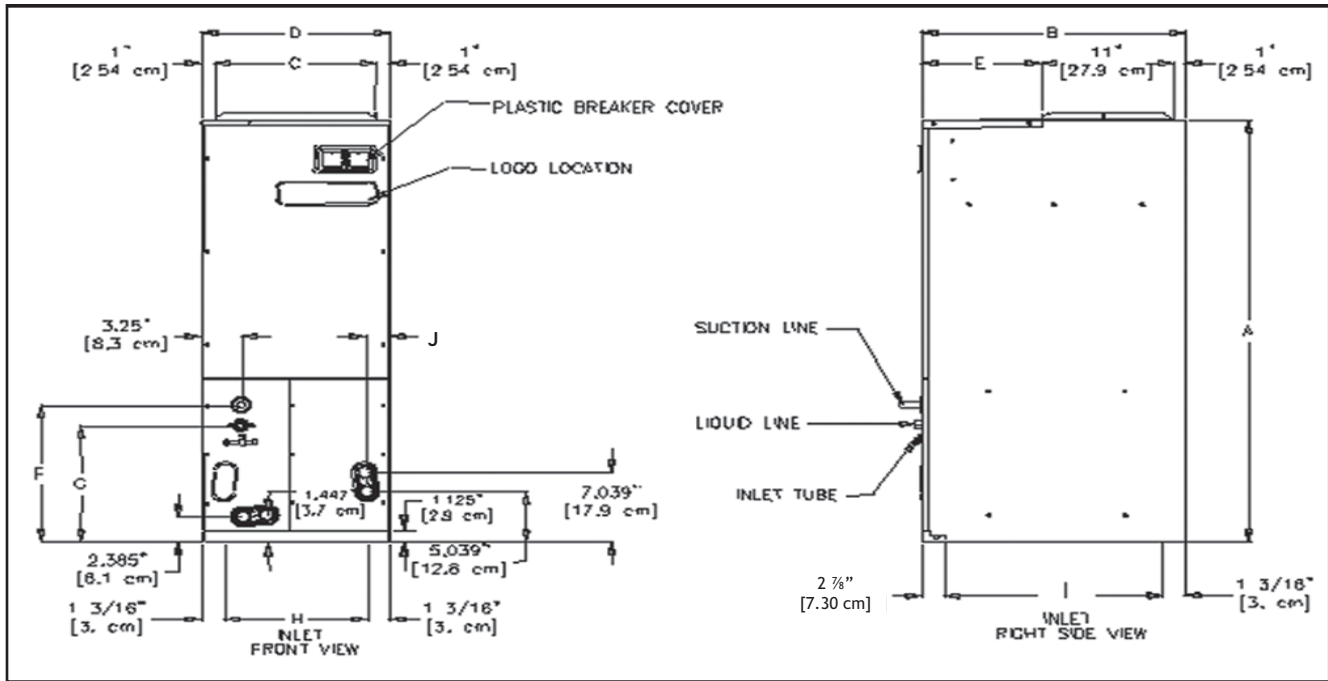

Model	A	B	C	D	E	F	G	H	I	J
ASPF183016	46 ³ / ₄ "	22"	17 ¹ / ₂ "	19 ¹ / ₂ "	10"	14 ¹ / ₂ "	11 ¹⁵ / ₁₆ "	17 ¹ / ₈ "	17 ¹⁵ / ₁₆ "	2"
ASPF303616	53 ³ / ₄ "	24"	20"	22"	12"	19 ⁵ / ₈ "	11 ¹⁵ / ₁₆ "	19 ⁵ / ₈ "	19 ¹⁵ / ₁₆ "	1 ¹³ / ₁₆ "
ASPF426016	53 ³ / ₄ "	24"	20"	22"	12"	19 ⁵ / ₈ "	11 ¹⁵ / ₁₆ "	19 ⁵ / ₈ "	19 ¹⁵ / ₁₆ "	1 ¹³ / ₁₆ "


BLOWER PERFORMANCE

Model	Motor Speed Tap	CFM delivered against External Static Pressure				
		0.1"	0.2"	0.3"	0.4"	0.5"
ASPF183016	Low (T1)	700	670	650	595	510
	Med-Low (T2)	820	785	765	745	705
	Medium (T3)	920	900	850	840	815
	Med-High (T4)	1,075	1,055	1,015	975	960
	High (T5)	1,130	1,115	1,085	1,040	1,000
ASPF303616	Low (T1)	1,060	865	600	515	420
	Med-Low (T2)	1,105	910	795	745	690
	Medium (T3)	1,165	1,070	1,020	960	915
	Med-High (T4)	1,285	1,240	1,195	1,140	1,100
	High (T5)	1,435	1,395	1,350	1,315	1,265
ASPF426016	Low (T1)	1,445	1,275	1,040	940	855
	Med-Low (T2)	1,545	1,405	1,325	1,260	1,145
	Medium (T3)	1,660	1,610	1,555	1,490	1,415
	Med-High (T4)	1,905	1,870	1,810	1,750	1,695
	High (T5)	2,115	2,070	2,000	1,965	1,915

Notes:

Assumes dry coil with filter in place; SCFM correction for wet coil = 4%
 All ASPF models are shipped from the factory with the speed tap set on T4.

ASPF***AA WIRING DIAGRAMS

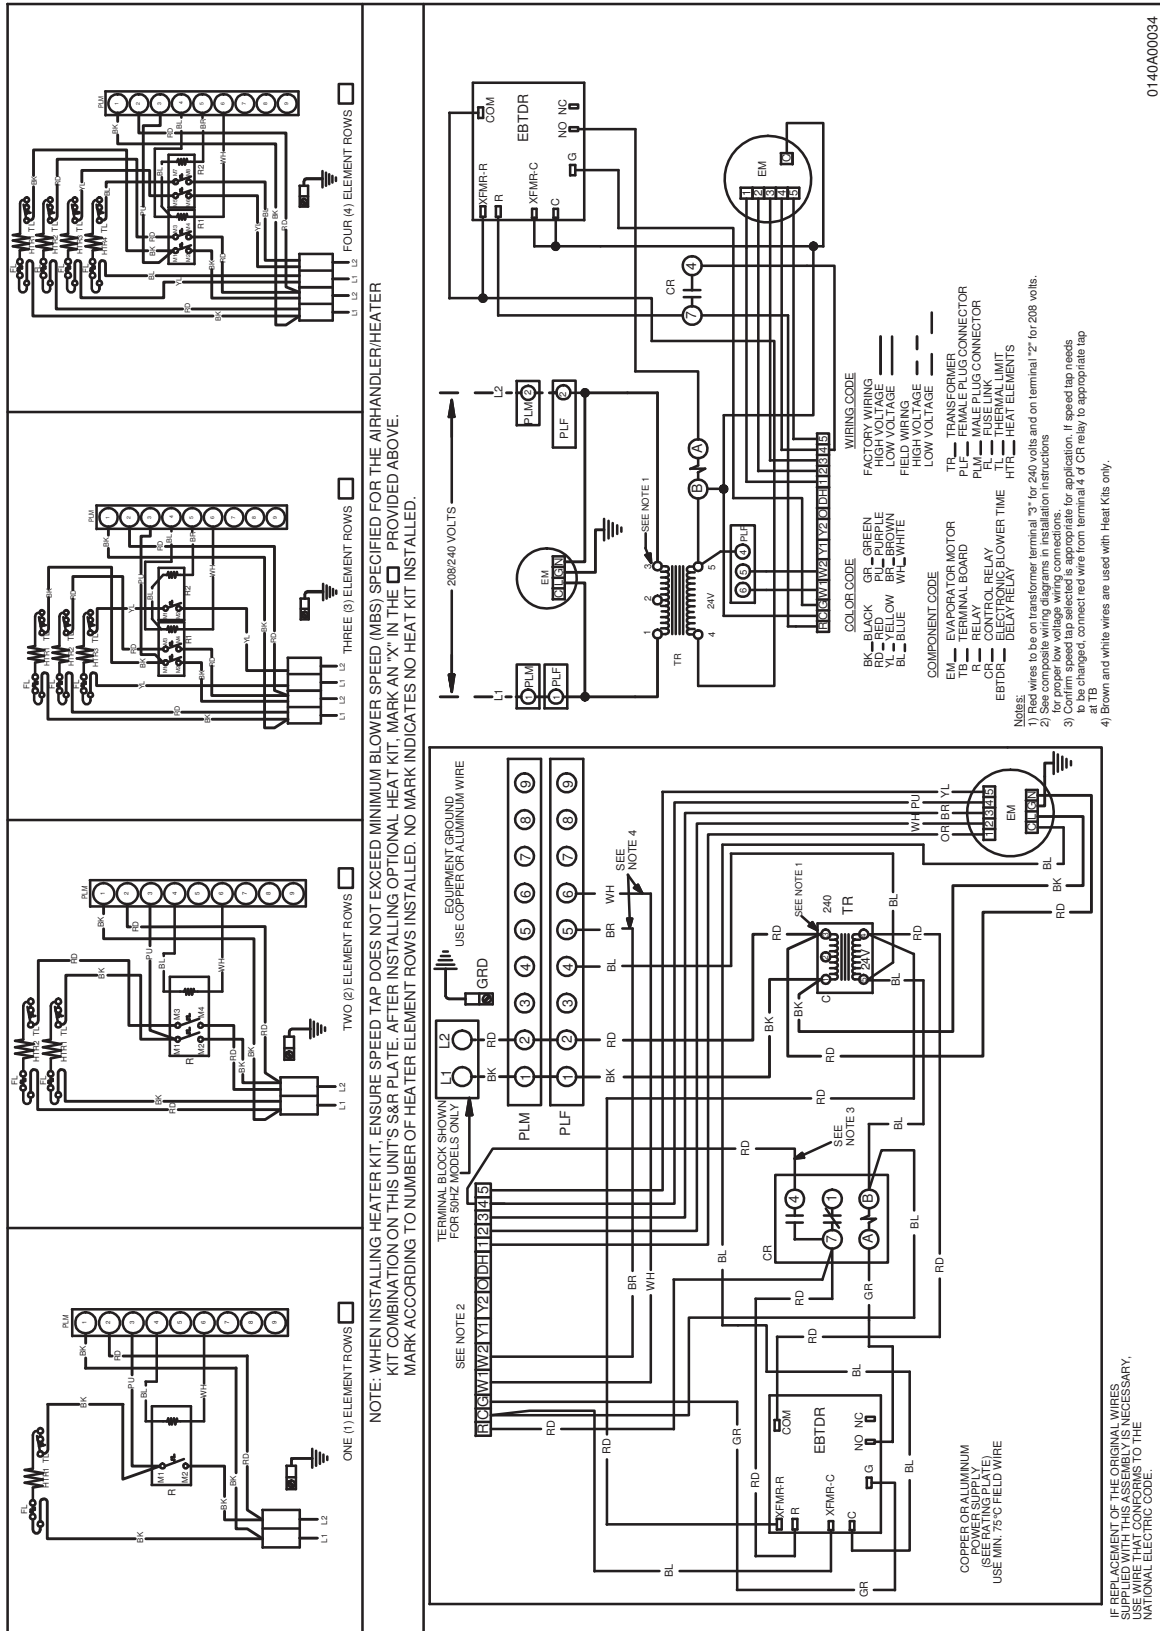

01-40A00034




WARNING


High Voltage:
 Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring schematic.

ASPF***BA WIRING DIAGRAMS

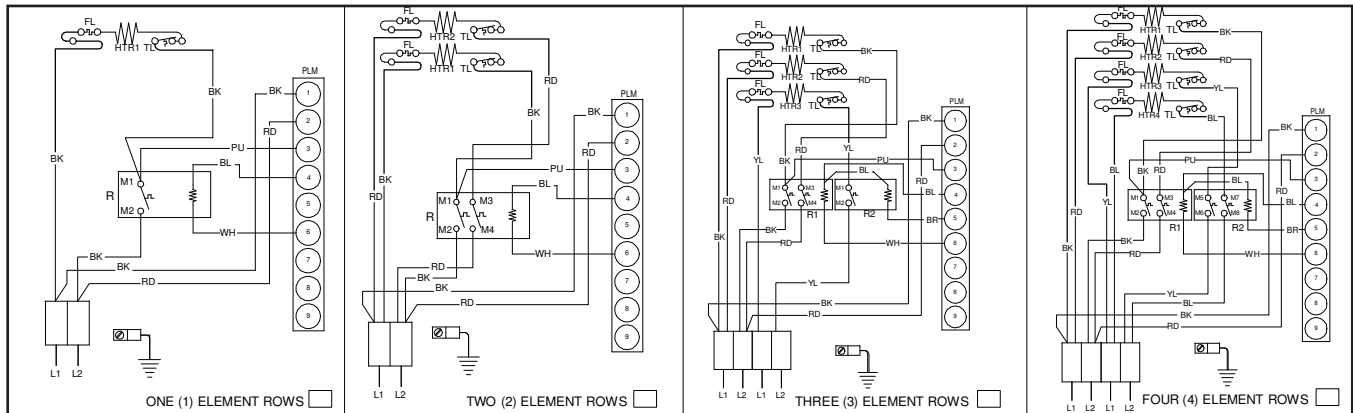

NOTE: WHEN INSTALLING HEATER KIT, ENSURE SPEED TAP DOES NOT EXCEED MINIMUM BLOWER SPEED (MBS) SPECIFIED FOR THE AIRHANDLER/HEATER KIT COMBINATION ON THIS UNIT'S S&R PLATE. AFTER INSTALLING OPTIONAL HEAT KIT, MARK AN "X" IN THE PROVIDED ABOVE. MARK ACCORDING TO NUMBER OF HEATER ELEMENT ROWS INSTALLED. NO MARK INDICATES NO HEAT KIT INSTALLED.

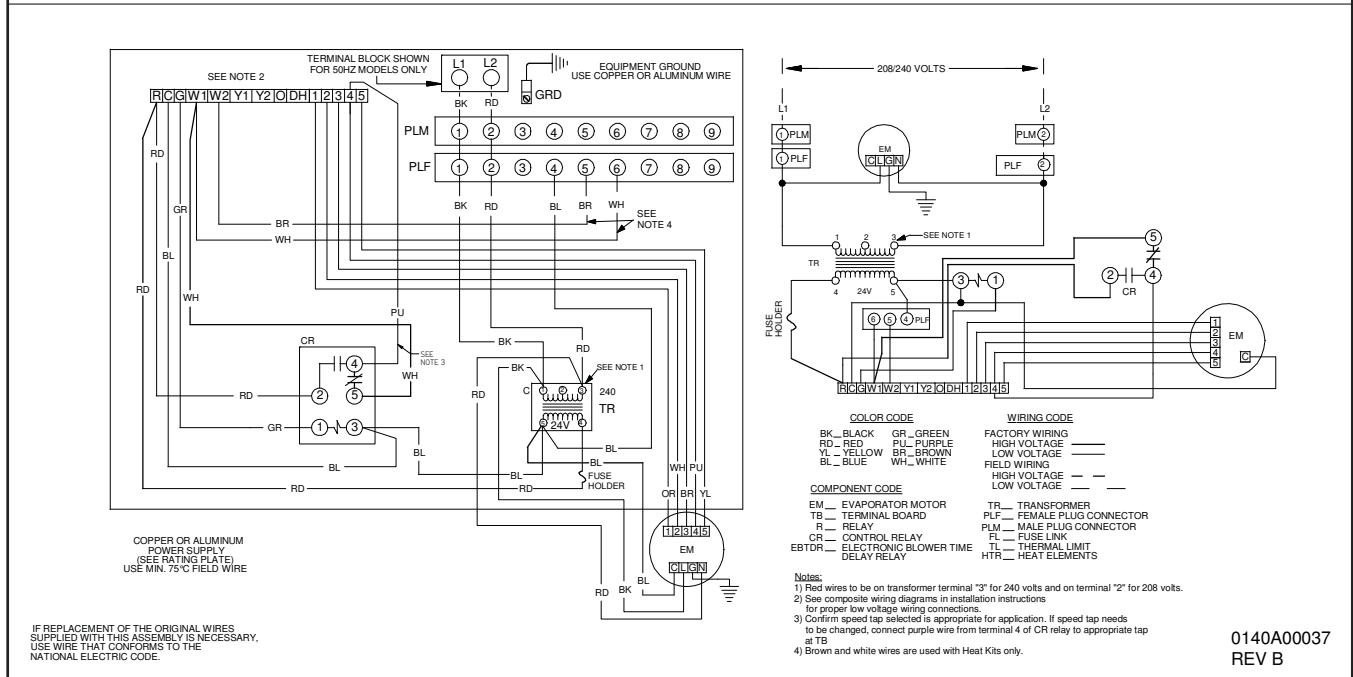

0140A00037
REV B

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring schematic.

<p>WARNING</p>	<p>High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.</p>	
-----------------------	---	--

ACCESSORIES

HEAT KIT SELECTION

	ASPF 183016	ASPF 303616	ASPF 426016
HKR-03*	X	X	X
HKR-05*, HKR-05C*	X	X	X
HKR-06*	X	X	X
HKR-08*, HKR-08C*	X ¹	X ¹	X
HKR-10*, HKR-10C*	X ¹	X ¹	X
HKR-15C*	X ²	X ²	X ¹
HKR-20C*		X ²	X ¹
HKR-21C*		X ²	X ¹
^ HKR3-15*	X ²	X ²	X ¹
^ HKR3-20*		X ²	X ¹

- * Revision level that may or may not be designated
- C Circuit breaker option
- ^ Heat kit requires three-phase power supply
- ¹ Air handler must be on speed tap 2, 3, 4, or 5.
- ² Air handler must be on speed tap 4 or 5.

FILTERS

ASPF	Filter #	Qty Re- quired
1830	FIL-36-42	1
3036	FIL 48-61	1
4260	FIL 48-61	1

EXPANSION VALVE KITS FOR AIR CONDITIONING AND HEAT PUMP APPLICATIONS

Kit Number	Description	Application	Refrigerant	Tonnage: Outdoor Unit
XVB18-36C	20% Bleed Valve	AC Only	R-22	1½ - 3 Ton
XVB42-60C	20% Bleed Valve	AC Only	R-22	3½ - 5 Ton
XV18-36C	Non-bleed Valve	AC Only	R-22	1½ - 3 Ton
XV42-60C	Non-bleed Valve	AC Only	R-22	3½ - 5 Ton
TX2N2	Non-bleed Valve	AC or HP	R-22	1½ - 2 Ton
TX3N2	Non-bleed Valve	AC or HP	R-22	2½ - 3 Ton
TX5N2	Non-bleed Valve	AC or HP	R-22	3½ - 5 Ton
TX2N4	Non-bleed Valve	AC or HP	R-410A	1½ - 2 Ton
TX3N4	Non-bleed Valve	AC or HP	R-410A	2½ - 3 Ton
TX5N4	Non-bleed Valve	AC or HP	R-410A	3½ - 5 Ton

DRAIN PAN INSULATION KITS

DOWNFLOW APPLICATIONS

Chassis Size	Insulation Kit
Small (15½")	DPI18-30/20
Medium (19½")	DPI36-42/20
Large (22")	DPI48-60/20

Note: Each kit contains enough material to modify 20 coils

HORIZONTAL APPLICATIONS

Chassis Size	Insulation Kit
Small (15½")	DPIH18-32
Medium (19½")	DPIH36-42
Large (22")	DPIH48-61

Note: Each kit contains enough material to modify 20 coils

